



## Desk Module – Smart Extension Lead

A new era of smart, safety-first extension units that save energy, report occupancy, and protect your building.

Our next-generation of smart extension leads are designed to meet the growing demands of hybrid workplaces.

The on or under desk extensions deliver complete workspace intelligence: energy savings, occupancy reporting, and plug-level risk prevention.

[Talk to Sales](#)

### Automate energy control



With automated appliance identification and hot-desk control, power is only used when needed.

### Occupancy without sensors



Understand desk usage patterns to ensure uninterrupted appliance operation. No additional hardware required.

### Safety built-in




Auto shut-off for unsafe energy draws. Reduces fire risks by design.

### Desk-level insights and employee behaviour



- Premium finish for on-desk presentation
- Integrated 65W USB-C for laptops and devices
- Designed for hybrid workers and clean desk policies
- Ideal for high-traffic workstations, hot desks, and agile workspaces
- Display to support employee engagement around carbon reduction

**Smart power, where it's seen.**

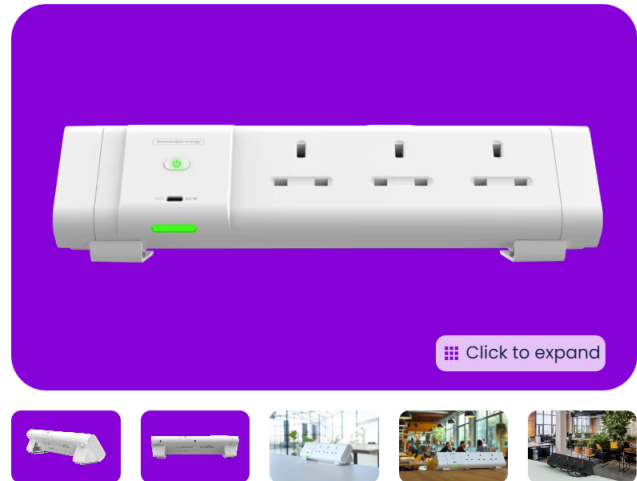

---

# Installation and specifications

Our smart extension leads are designed for easy installation. Just plug them in, connect to your network, and you're ready to start eliminating wasted energy. Every unit is built to commercial safety standards and tested for reliability, so you can deploy them across your buildings with confidence. If you need support, our team is always on hand to guide you through setup and integration.

| Category              | Description                                |
|-----------------------|--------------------------------------------|
| Model No              | TGU                                        |
| Amp rating            | 5A individual                              |
| Power voltage supply  | 100-250 V AC                               |
| Power consumption     | <1 W                                       |
| USB                   | USBC 65W                                   |
| Safety Shut Off       | All Channels: 5 A > 10 seconds             |
| Operating temperature | -10°C to +40°C                             |
| Operating humidity    | 0-95% RH, no condensation                  |
| Dimensions            | 283 x 74 x 34 mm                           |
| Control               | Single Button Override                     |
| Wi-Fi support         | 2.4 GHz/5GHz                               |
| Wi-Fi security        | WPA2/WPA3 PSK                              |
| Colour                | White                                      |
| Certifications        | BS1363, UKCA, CE                           |
| Mounting              | Removable desk clamps                      |
| Connectors            | GST to Three Pin, GST to GST, GST Splitter |

